

# Accessories

## End cap for side guide profile



An end cap is attached to the end of a side guide. The contour prevents products from being caught.

Designation	Dimensions	Reference number
End cap for side guide profile	100 x 40 x 40 mm	63010039


## End cap for side profile



The end cap closes a side profile at the front.

Designation	Dimensions	Reference number
End cap for side profile	115 x 35 x 3 mm	64000900


## Actuator

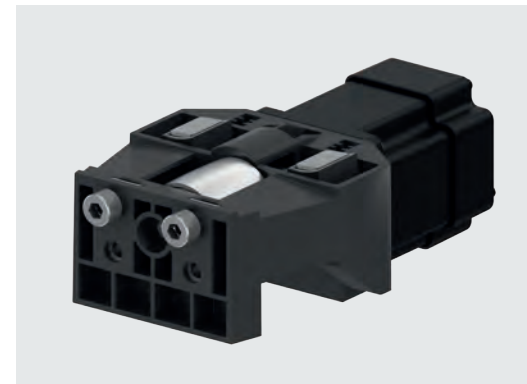

By using 24 V actuators, a 400 V roller conveyor can be operated as a zone conveyor. The actuators can be controlled for zero pressure accumulation mode via the Interroll controllers. Additional components are required to change a transport conveyor into a zone conveyor. Please contact your Interroll customer representative.

Designation	Dimensions	Reference number
24 V actuator	177 x 100 x 65 mm	63010261

## Magnetic Speed Controller MSC 50

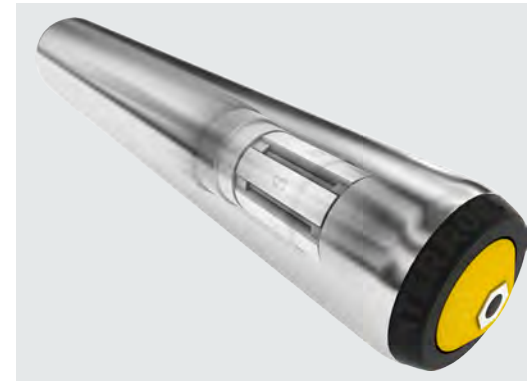

The magnetic speed controller MSC 50 is a purely mechanical speed controller that ensures a controlled, slow speed on gravity conveyors with materials weighing from 0.5 kg (1 lb) to a maximum of 35 kg (77 lbs). The magnetic speed controller operates without a gear box, thus enabling startup for very lightweight containers. Heavy containers are transported at a controlled speed thanks to the consistently high braking performance.

Designation	Dimensions
Magnetic Speed Controller MSC 50	Min./max. Between frames (BF): 210 – 1,400 mm Tube diameter: Steel 51 mm, steel with PU sleeve 54 mm